

NRP SERIES




Industrial & Electrical Components

Miniature P.C.B Relay

Part No.

NRP-13



- 8A 240Vac 2 pole Slim relay
- Compact dimension
- UL/C-UL recognized
- Sealed type available

CONTACT

Arrangement	2A / 2C
Contact Material	Silver Alloy
Contact Resistive (At 6VDC 1A)	$\leq 100 \text{ m}\Omega$
Rating	NO: 5A / 240VAC 30VDC
Resistive load ($\cos\phi=1$)	NC: 3A / 240VAC 30VDC
Max. Switching Voltage	250VAC 30VDC
Max. Switching Current	8A
Max. Switching Power	1250VA / 150W
Expected life	
Mechanical	1×10^6 Min (at 300ops/Min)
Electrical	1×10^5 Min. (at 30ops/Min)

CHARACTERISTICS

Operate Time	20 ms. Max.
Release Time	10 ms. Max.
Initial breakdown voltage	
Between Coil & Contact	5000VAC (50/60Hz)for 1 min.
Between Open Contacts	1000VAC (50/60Hz)for 1 min.
Insulation Resistance	Min.100M Ω (500 VDC)
Shock:	
Endurance	10G
Damage	100G
Vibration	
Endurance	10 to 55 Hz , 1.5mm D.A.
Damage	10 to 55 Hz , 1.5mm D.A.
Humidity	40%~85%RH
Ambient temperature	-45 to +85 $^{\circ}$ C
Unit weight	$\leq 14\text{g}$

ORDERING INFORMATION

e.g

NRP - **13** - **C** - **12D** - **H**

① ② ③ ④ ⑤

① Series: Miniature p.c.b Relay

② Part No.

③ Contact Form:

C=2C/O; A = N/O; B= N/C

④ Coil Voltage: 12D= 12Vdc 24D= 24Vdc

⑤ Nil= 0.72W coil power


H= 0.54W coil power

COIL DATA (at 20°C)


Nominal Voltage (VDC)	Pick-up Voltage VDC(Max)	Drop-out Voltage VDC(Min)	Coil Resistance (Ω)±10%		Nominal operating Power (W)	Max.Allowable Voltage
			High Sensitive 0.54W	Standard 0.72W		
3	2.40	0.15	16.7	12.5	0.54 / 0.72	130% of nominal Voltage
5	4.00	0.25	46	35		
6	4.80	0.30	67	50		
9	7.20	0.45	150	113		
12	9.60	0.60	267	200		
24	19.20	1.20	1067	800		
48	38.40	2.40	4267	3200		

DIMENSIONS

Unit: mm

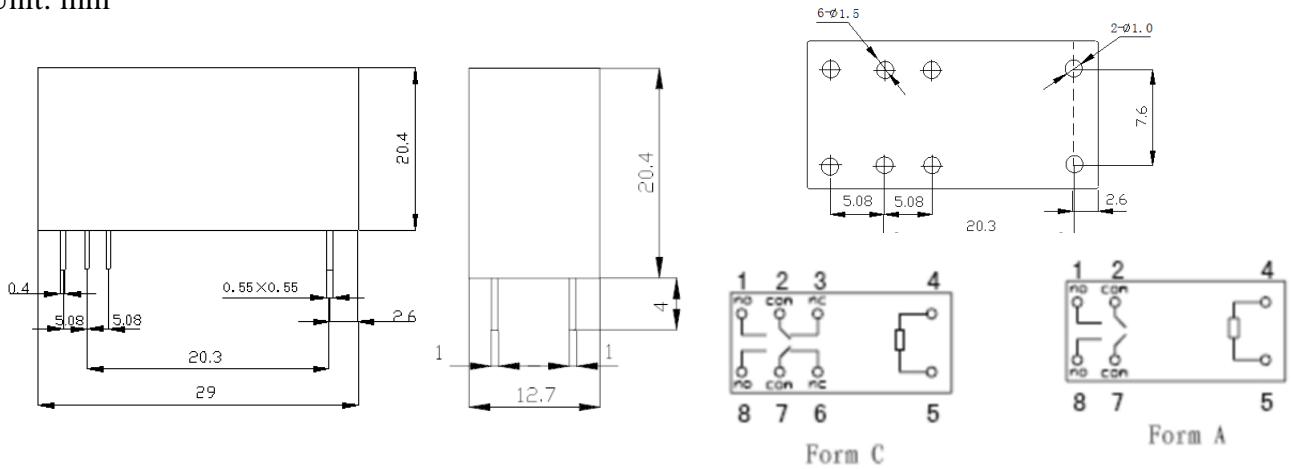

Reference Data 性能曲线图

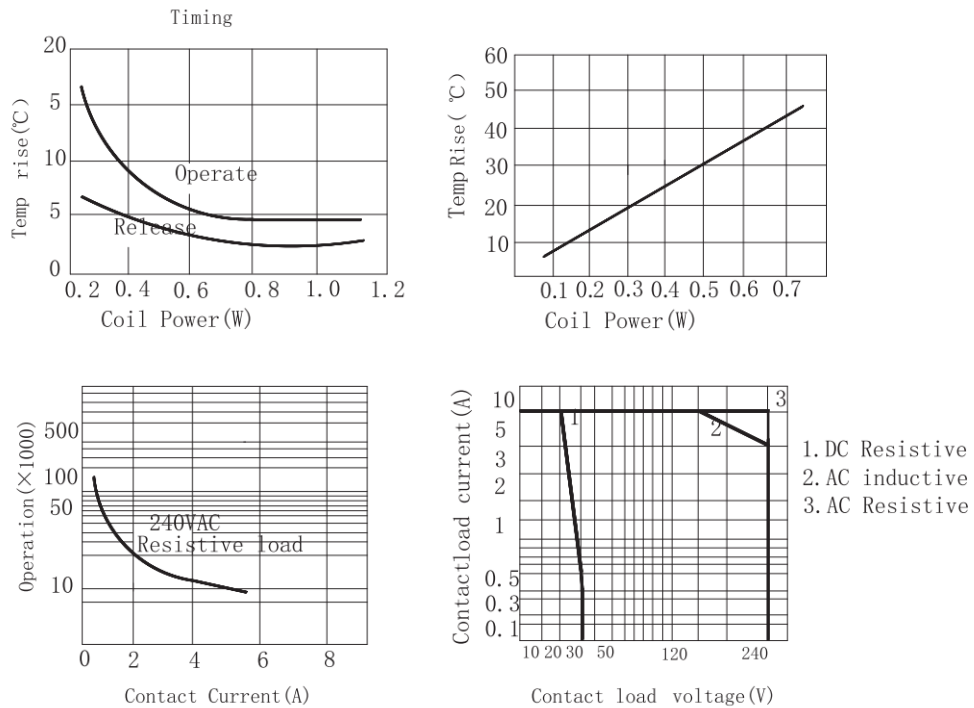

Disclaimer:

The specifications in this datasheet are for reference only and subject to change without notice.No chance for us to evaluate all the specifications and technical parameters for each possible application.The users will take the responsibility to choose the correct products for their own applications. While if any technical support is needed, please contact NCR team for assistance.