

Miniature PCB Relay

Part No.

NRP07



Compact size with universal footprint High contact capacity: 12A

UL/C-UL recognized Sealed type available

CONTACT

Arrangement	1A/1B/1C		
Contact Material	Silver Alloy		
Contact Resistive (6VDC, 100mA)	Max.: 100 mΩ		
Rating	7A / 240VAC /28VDC		
Resistive load (cosφ=1	10A/ 240VAC /28VDC		
	10A / 277VAC /30VDC		
Max. Switching Voltage	277VAC / 30VDC		
Max. Switching Power	2770VA / 300W		
Expected life			
Mechanical	1×10 ⁷		
Electrical	1×10 ⁵		

CHARACTERISTICS

Operate Time	10msec. Max.			
Release Time	5msec. Max.			
Initial breakdown voltage				
Between Coil & Contact	1800VAC (50/60Hz)for 1 min.			
Between Open Contacts	1100VAC (50/60Hz)for 1 min.			
Insulation Resistance	Min.100MΩ (500 VDC)			
Ambient temperature	-25 ~ +55			
Unit weight	9g			

TYPICAL APPLICATION

- 1) Home appliances: conditioner, hearter, etc.
- 2) Auomotive: Power-windows,car antenna,door lock,etc.

ORDERING INFORMATION

e.g

NRP - 07 - C - 12D

Series: Miniature p.c.b relay

Part No.

Contact Form:

C=1C/O; A = N/O; B = N/C

Coil Voltage: 12D= 12Vdc

S= Sealed type

COIL DATA (at 23)


Nominal	Pick-up	Drop-out	Coil	Nominal operating	Max.Allowable
Voltage	Voltage	Voltage	Resistance	Power	Voltage
(VDC)	VDC(Max)	VDC(Min)	$(\Omega)\pm10\%$	(W)	
3	2.25	0.30	25	_	
5	3.75	0.50	70		
6	4.50	0.60	100		110% of
9	6.75	0.90	225	0.36	nominal Voltage
12	9.00	1.20	400	_	
24	18.00	2.40	1600	_	
48	36.00	4.80	6400	_	

DIMENSIONS


Unit: mm

Outline Dimensions

PCB Layout (Bottom view)

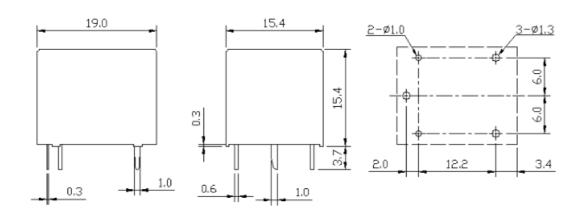

Wiring Diagram (Bottom view)

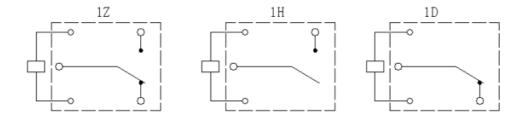

Disclaimer:

The specifications in this datasheet are for reference only and subject to change without notice. No chance for us to evaluate all the specifications and technical parameters for each possible application. The users will take the responsibility to choose the correct products for their own applications. While if any technical support is needed, please contact NCR team for assistance.