

## NRP SERIES



Industrial & Electrical Components

## Miniature P.C.B Relay

Part No.

**NRP-13T**



8A 250Vac DPDT  
Compact dimension  
UL/C-UL recognized  
Sealed type available

### CONTACT

Arrangement	2A / 2B / 2C
Contact Material	Silver Alloy
Contact Resistive (At 6VDC 1A)	100 mΩ
Rating	8 A 250VAC
Resistive load (cosφ=1)	8 A 30VDC
Max. Switching Voltage	250VAC
Max. Switching Current	8A
Max. Switching Power	2000VA
Expected life	
Mechanical	1×10 <sup>7</sup>
Electrical	5×10 <sup>4</sup>

### CHARACTERISTICS

Operate Time	10 ms. Max.
Release Time	5 ms. Max.
Initial breakdown voltage	
Between Coil & Contact	5000VAC (50/60Hz) for 1 min
Between Open Contacts	1000VAC (50/60Hz) for 1 min
Insulation Resistance	Min.500MΩ (500 VDC)
Shock:	Endurance 98.1 m/s <sup>2</sup> Min
	Damage 981 m/s <sup>2</sup> Min
Vibration	10 to 55 Hz ,1.5mm D.A. for 15 minutes
Humidity	5%~85%RH
Ambient temperature	-40 to +85
Unit weight	13g

### ORDERING INFORMATION

e.g

**NRP - 13T - C - 12D**

Series: Miniature p.c.b Relay

T=15.6mm height special type

Contact Form:


C=C/O; A = N/O; B= N/C

Coil Voltage: 12D= 12Vdc 24D= 24Vdc


## COIL DATA (at 20 )

Nominal Voltage (VDC)	Pick-up Voltage VDC(Max)	Drop-out Voltage VDC(Min)	Coil Resistance ( $\Omega$ ) $\pm 10\%$	Nominal Current (mA) $\pm 10\%$	Nominal operating Power (W)	Max.Allowable Voltage
5	3.75	0.50	62.5	80	0.40	130% of nominal Voltage
6	4.50	0.60	90	66		
12	9.00	1.20	360	33		
24	18.00	2.40	1440	16.7		
48	36.00	4.80	5760	8.3		
60	45.00	6.00	7500	8.0		
110	82.50	11.00	30000	3.7		

## DIMENSIONS

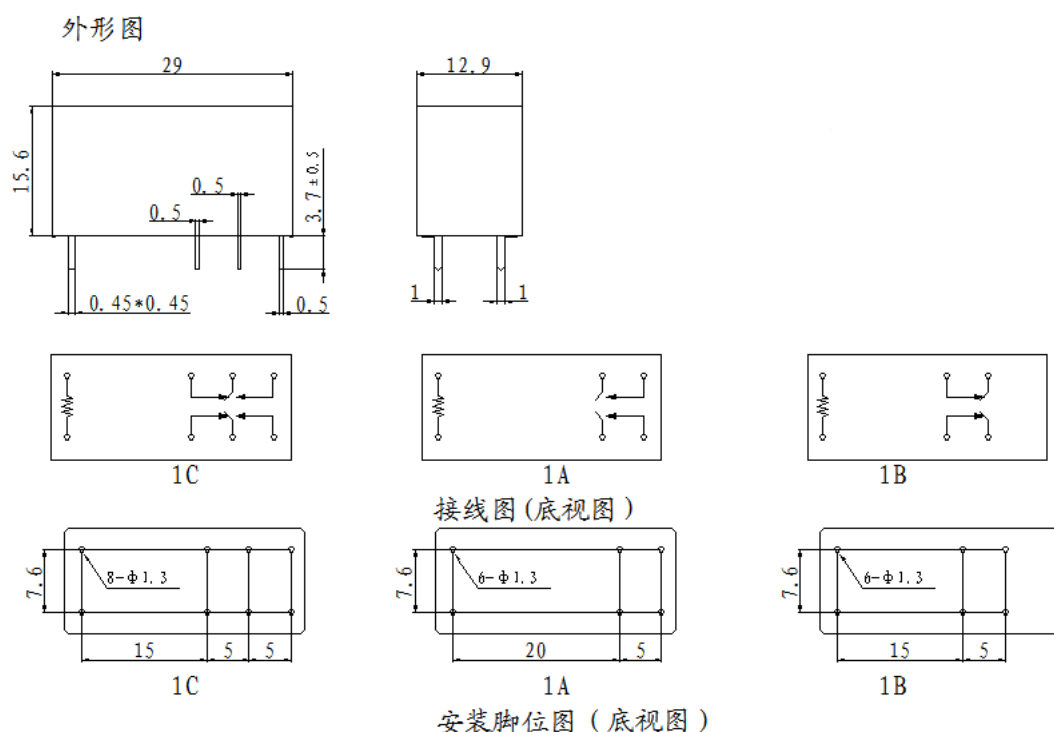

## Reference Data 性能曲线图

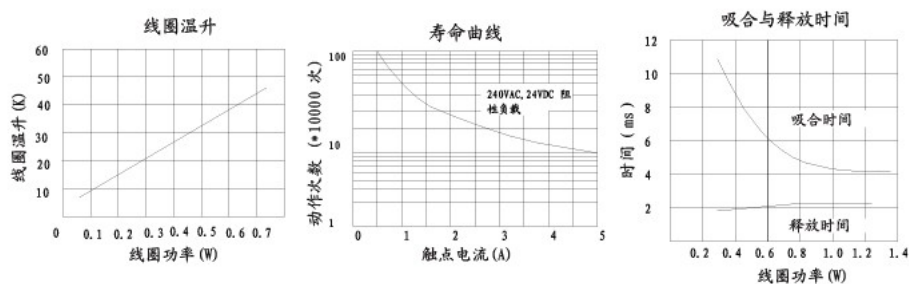

## Disclaimer:

The specifications in this datasheet are for reference only and subject to change without notice. No chance for us to evaluate all the specifications and technical parameters for each possible application. The users will take the responsibility to choose the correct products for their own applications. While if any technical support is needed, please contact NCR team for assistance.